


- 01. MAKE HOLE PATTERN
- 02. SWITCH OFF MAIN
- 03. INSTALL THE BASE PLATE
- 04. CONNECT LAMP TO THE MAIN
- 05. DRIVE IN THE SCREWS UNTILL TIGHT
- 06. ADJUST BEAMING
- 07. SWITCH ON THE MAIN AND LIGHT ON



Lamp: CREE XPE-R3
 Color: 6000/4000/3000K
 Color rendering: Ra85~90
 Input: 100V-240V AC
 Current: Constant 350mA
 Frequency: 50/60Hz
 Output lumens: 732LM
 Watt: 6W
 Efficiency: 122lm/W
 Beam angle: 60°
 Adjustable: ±360°
 Life span: 20,000hrs
 Operating temp: -20°C~+60°C
 Indoor use only
 IP20
 Dimmable: NO

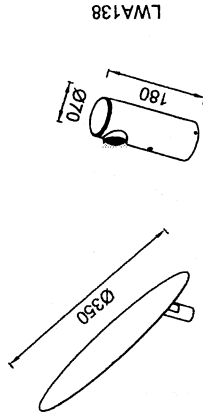

Cautions: a. Installed by qualified electrician
 b. Use only power-supply supplied
 by manufacturer for products guarantee